

PINSHAKERS


Pinshakers Universal Shaker Motor Kit Installation

Stern S.A.M. Driver Board, Wire Harness, & Power Supply Installation – Updated 08/10/2019

Tools Required:

- Small Phillips Head Screwdriver
- 5/16" Nut Driver
- Wire Cutters – (For cutting the ends of the zip ties)
- Pen – (For adjusting the dip switches)
- 1/4" Nut Driver


Note: Please hold onto this installation manual! In order to keep the price down on our kits we are only shipping one manual per household. You can still download our manuals from the website or watch the in-depth youtube installation videos.

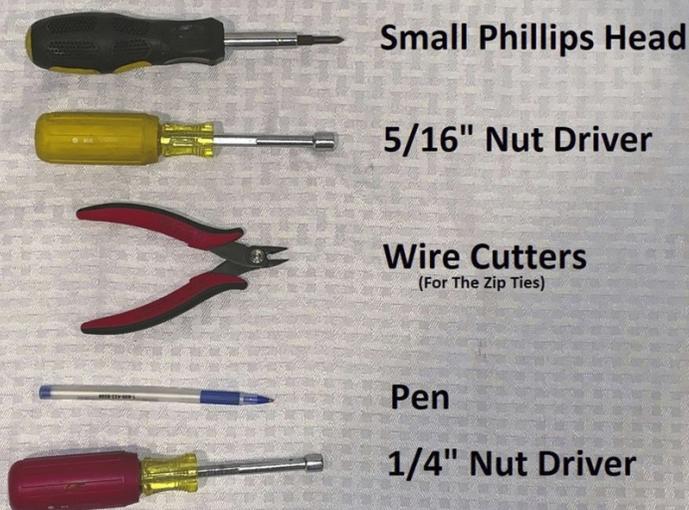

Parts Required (included):

- Motor Driver Board
- 12vdc 5A Power Supply
- 6' Power Supply Extension
- Voltage Input Adapter
- 3 x Zip Ties
- 2 x Small Wood Screws
- Wire Harness "A" and "B" or Custom Harness
- Installation Manual
- Dip Switch Settings
- Any Optional Accessories

Unpack and inventory all the included components. Please let us know as soon as possible if you have any missing items.

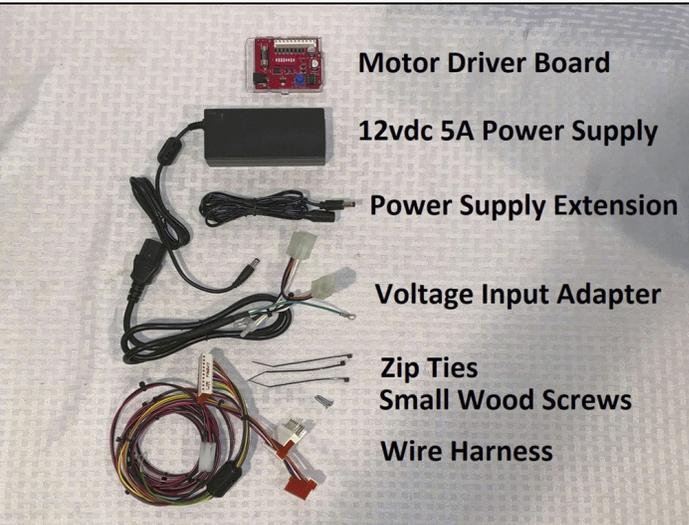


EXPECTATIONS OF USE


You agree to use our products in the manner described in the documentation provided. Any deviation from the provided documentation, or any custom modifications to our products, will likely cause damage to persons or property. You agree to only install our products in fully working and operating pinball machines. Any prior issues with grounding, loose connections, game resets, cold solder joints, hacked up circuit boards and other components, or any other pre-existing problems with your pinball machine will likely result in the damage of our product and/or your pinball machine. Other risks of installing our product in a machine that is not fully working is that of fire or bodily harm. Pinshakers will in no way be held responsible or liable for any damage that results in the use of this kit; either to any person, your pinball machine, or structure in which the pinball machine is operated.



Remove All Power!

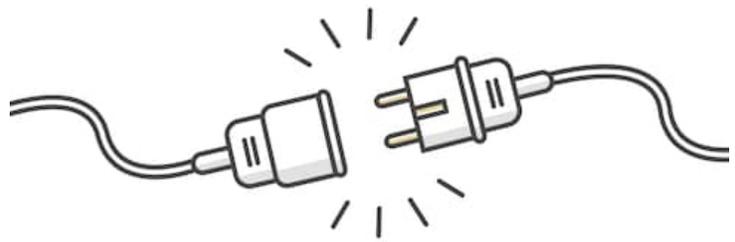

On/Off Switch Is NOT Enough!

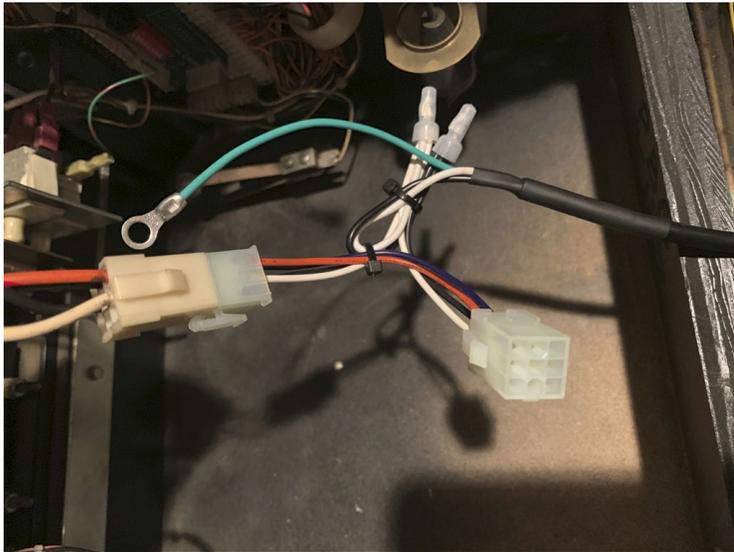


Step 1: Bill Validator Adapter Installation

If this is not the type of power supply adapter you received, skip to Step 3.

First we will talk about the bill validator. If your machine has this small 9pin connector attached to the coin door harness, you will simply take the included power supply harness and plug it into the bill validator connector as shown in the image to the right.

Step 2: Take the 1/4" nut driver and install the grounding cable to the grounding braid as shown in the image to the left. This is very important!

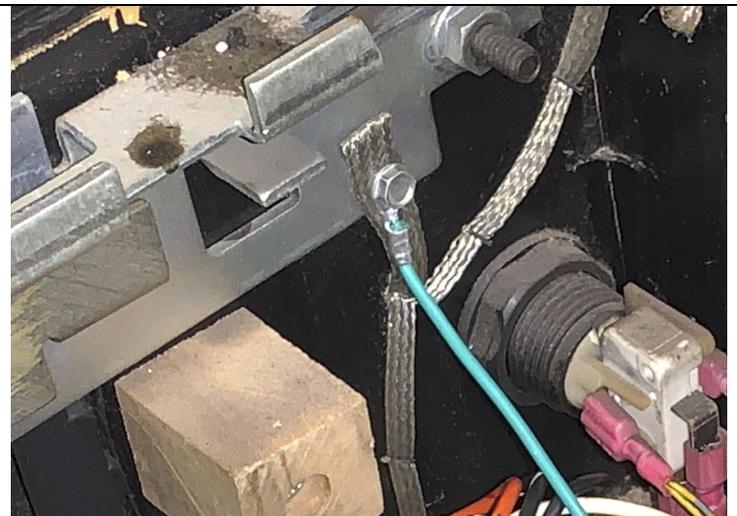



Step 3: Service Port Connection

The last option for connecting the power supply is by plugging it directly into the service port. While this method may seem like the easiest of them all, the problem is that service port plug is always live whenever the pinball machine is plugged in. Turning off the switch to the pinball machine does not turn off the power to this service port. So you will need to make sure that whenever the machine is not in use, that you remove all power from the machine otherwise the included power supply, motor driver board, and shaker motor will remain powered. No damage will likely result in doing this, but if you are like me I do not like to leave things like this powered when unattended.


Step 4: Connect the power supply adapter to the power supply. Make sure you connect is securely and that it isn't loose when you wiggle it. Connect the 12vdc line from the power supply to the included 6' extension cord and run it to the back of the machine.




Step 5: Motor Driver Board Installation

Next take a look at your motor driver board. This is a good time to select the dip switch(s) you want to drive the shaker motor. Review the included dip switch matrix to determine what inputs you think you may want. You can always change them later after you install the board.

Locate the place where you want to mount the motor driver board. The example to the right is where we recommend installing the board in a Stern S.A.M. era machine. There is a strip of velcro already attached to the back of the driver board case. All you have to do is remove the backing and place the board to the side of the backbox.

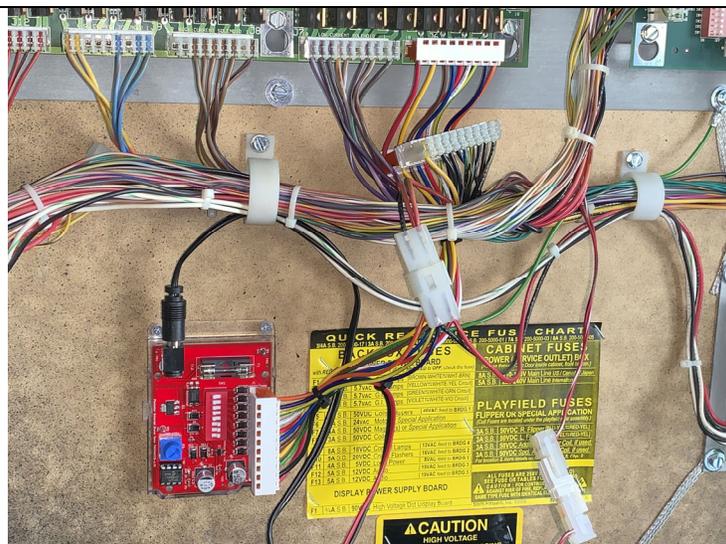

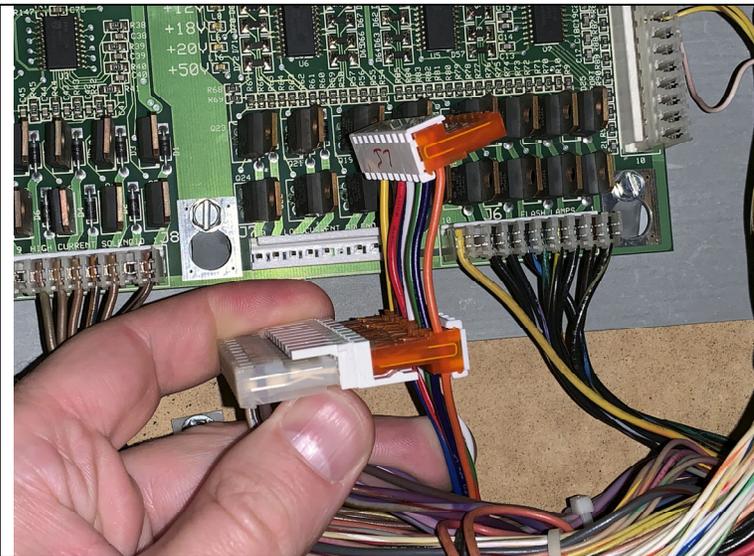

Step 6: Locate the power driver board connector for the type of wire harness you have. Unplug it and connect it inline with the “Z” adapter on the wiring harness. It will come pre-keyed and pre-labeled. Here is a quick reference list:

Harness “A”



J6

Harness “B”

J7


Here is an example of the wiring harness “B” connected to J7.

Swapping between the two harnesses is a breeze. Simply remove the old harness and exchange it for the new one. There may be a zip tie that connects the wire harness with the motor power and grounding wires. Just cut that zip tie and remove only the wire harness. You do not have to re-wire the ground or the power wires going to the motor in order to change between the two wiring harnesses.

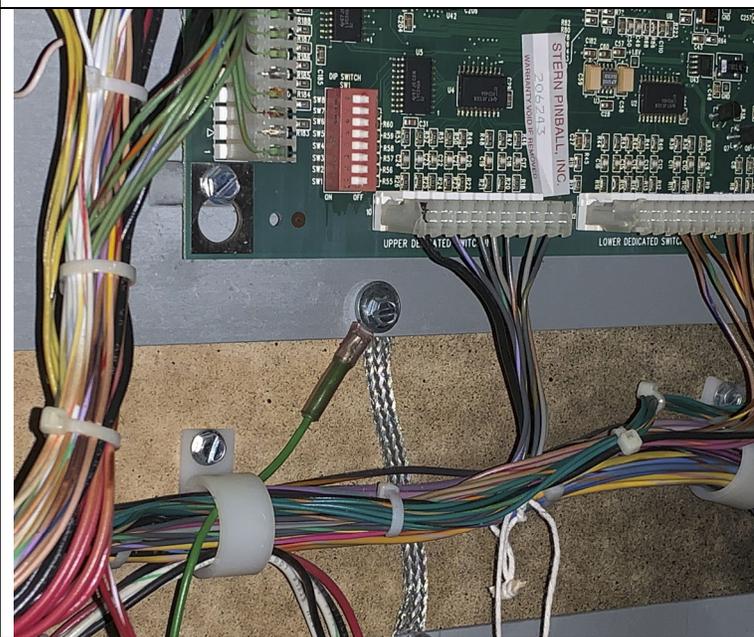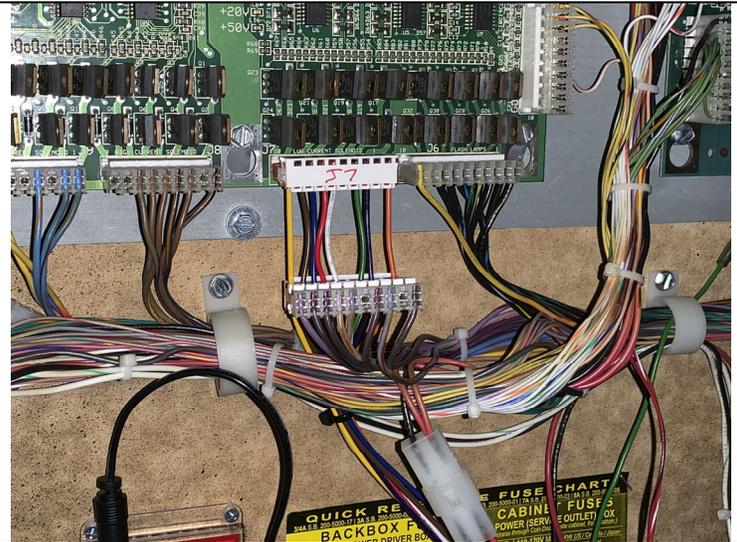


Step 7: Find the grounding strap screw below the MPU. Remove it and connect the grounding cable that is on the wiring harness. Do a visual check to make sure the grounding braid goes from the circuit board back panel and down into the cabinet. To be completely sure, I recommend you use a DMM in the continuity test mode and check for proper grounding between the circuit boards, this junction, and all the way to the front of the cabinet. If you notice any breaks in your grounding strap you must repair them prior to applying power to this motor driver board. Installing this kit in a machine where something is not properly grounded will result in the damage to your shaker motor driver board, the shaker motor, and possibly even your pinball machine circuit boards. **DO NOT SKIP THIS STEP, IT IS THE MOST IMPORTANT STEP OF ALL BESIDES UN-PLUGGING YOUR MACHINE!**

Step 8: Now run the shaker motor connection wires down into the cabinet. Use the wire wraps like the ones shown to the left to neatly secure the shaker motor wires. Connect the shaker motor, and leave all slack in the lines for both the shaker motor wires and the 12vdc cord in the back of the cabinet at the base of these wire wraps. That way when you go to fold the backbox down, the slack will be used and nothing will get caught and ripped out.

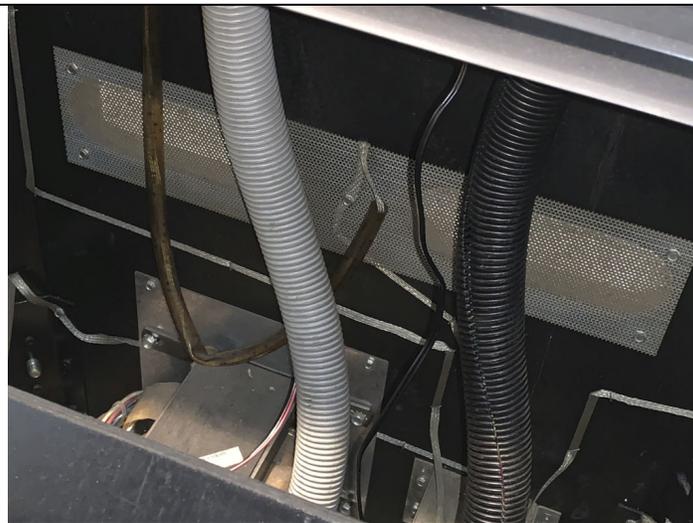

Step 9: Power the machine on and enter the test menu. Choose the Flasher or Solenoid test depending on which harness triggers you have set. Cycle through to the solenoid # that you chose to drive the motor and make sure the motor runs properly. Here you can go ahead and make adjustments to the motor speed potentiometer on the motor driver board. Move this adjustment knob by hand only, counter-clockwise to reduce the shake and clockwise to increase the shake. Do not use a screwdriver as you might slip and accidentally short something out on the driver board. Continue to test the motor and adjust the shake to provide the perfect amount of shake you desire.

Step 10: Feel free to change the dip switch settings with a pen or other like device on the motor driver board for the desired inputs that you want to drive the shaker motor. Do this while the machine is powered down. Do not mix up the dip switch on the motor driver board with the dip switch that may be on your MPU. The one on your MPU is used for setting the country settings only. You may turn on any dip switch on the motor driver board that does not have the "Do Not Use" label on the dip switch chart. You can choose to have more than one switch turned on at a time. Have fun with it and try to make it so that it feels as if this kit was always meant to be installed from the factory.

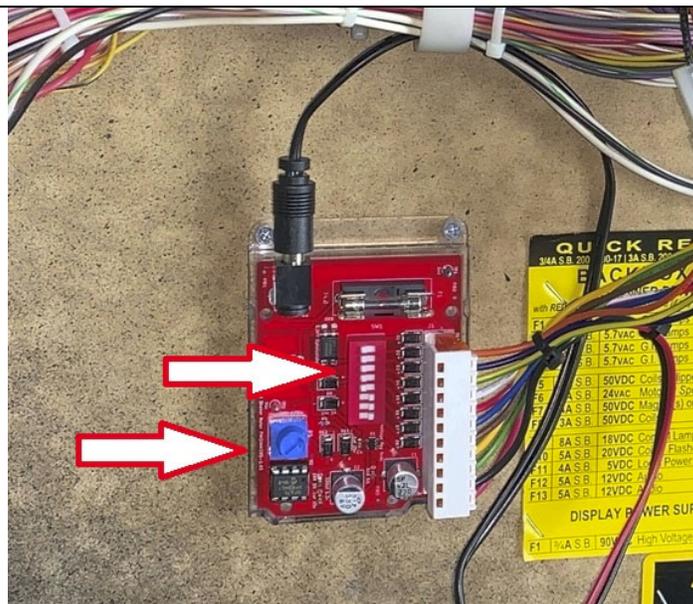

Congratulations, you have successfully installed the motor driver board, shaker motor, wiring harness, and power supply! If you have any questions or problems please do not hesitate to reach out to us for help.